

- Rugged and reliable
- Menu driven interface - no manuals needed
- Large, clear, backlit display for error free readings
- High sensitivity to low energy gamma radiation in harsh environments
- Durable - shock resistant design
- 2 x AAA batteries provide 600 h operation life
- Built in vibrator alarm and earphone connector for operation in noisy environment
- Low weight - only 160 g

RadEye G

Personal Radiation Detector

RadEye G -

The next generation of radiation meters

The RadEye G is a light-weight and very rugged instrument designed for quick and reliable measurement of gamma dose rates. Modern electronic circuitry guarantees excellent linearity over 6 decades of radiation intensity: from background level to 10 R/h - with overrange indication up to 1000 R/h.


The high-quality counter tube in conjunction with the non-metal instrument housing allows detection and reliable measurements down to very low gamma energies - a crucial feature in respect to accidents involving medical isotopes or Am-241 (a component of smoke detectors).

All essential functions can be easily accessed even while wearing protective gloves. The alarm-LED can be seen while the instrument is worn in a belt-holster. The instrument is also equipped with a built-in vibrator and an earphone-output for silent alarming or use in very noisy environment.

RadEye PC-Software for training and analysis

All settings and the data analysis can be done by an optional Windows™-based PC-software and an accompanying reader device. Changes in configuration, occurring alarms and errors are saved in the RadEye memory. These events can be read out via the option "logbook".

In order to allow retrospective analysis of any event, the latest 1600 dose rate values are stored in the internal data memory. For each time interval both the mean and the maximum measurement values are stored.

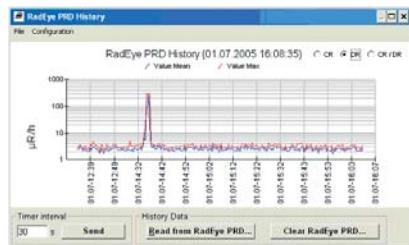

RadEye G history data




RadEye belt holster with openings for alarm-LED and earphone connector



RadEye dash board adapter for mobile area survey applications including optional charging of the batteries

Large graphic display with clear prefix and bar-graph

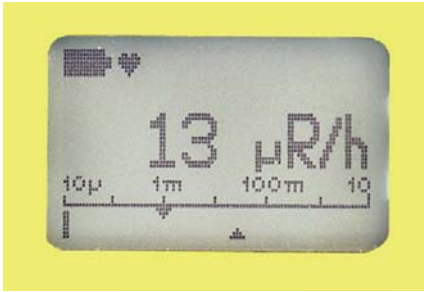


Background measurement

Alarm thresholds - two triangles in the bar-graph
Indication low



Approaching a source

Alarm thresholds - not yet exceeded
Trend arrow indicates increasing radiation level



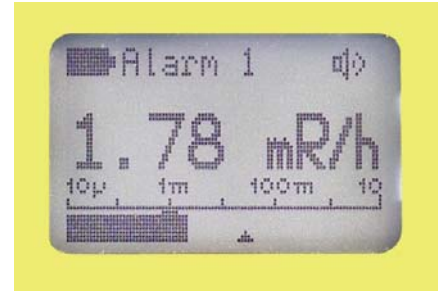


Alarm level 1 exceeded

"Alarm 1" sign and "speaker" sign show up
Absence of trend arrow indicates stable radiation level - reading can be taken

Menu Operation

All factory-set parameters can be easily modified on the RadEye or using optional software. These menu operations can also be partially or fully blocked to simplify the instrument and to avoid any faulty operation. Navigation is made easy by a clear and intuitive user concept.

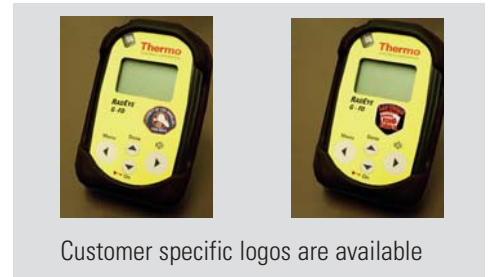

Customer specific logos are available

- Rugged and reliable - Removable rubber sleeve for extra protection
- Large display for clear information
- Bright LED-illumination allows operation in smoke and darkness
- Weighs only 160 g (96 x 61 x 31 mm) - true "pocket meter"
- Top alarm indication - can be operated in holster
- One hot and four advanced buttons - easy to use, no PC required
- Low power technology - 600 h operation time on 2 AAA cells
- Rechargeable batteries can be used - low cost of ownership
- Overload indication up to 1000 R/h - personal safety
- 1600 data points (mean/max.) - allows retrospective analysis
- PC-software with real-time graph - perfect for tutorial and training
- Adaptable user interface - can be optimized to application / user group
- Earphone output for noisy environment
- Alarm relay output - for area monitor application
- Designed to meet relevant NATO standards
- Designed to exceed ANSI 42.33 test criteria



Cost saving with rechargeable batteries

Detector	Energy compensated GM-tube
Measuring Range	5 µR/h - 10 R/h
Overrange Indication	1000 R/h
Energy Range (+/- 30 %)	45 keV - 1.3 MeV
Count Rate for Cs-137 (662 keV)	17 cps per mR/h



Thermo Scientific- a reliable partner of firebrigades and first responders worldwide

This specification sheet is for informational purposes only and is subject to change without notice. Thermo Fisher Scientific makes no warranties, expressed or implied, in this product summary.
© 2007 Thermo Fisher Scientific Inc. All rights reserved. LITRadEyeG-e-V1.1_14Nov07

www.thermo.com

Thermo
SCIENTIFIC

USA:
27 Forge Parkway
Franklin MA 02038
USA
+1 (800) 274-4212
+1 (508) 520 2815 fax

UK:
Bath Road
Beenham, Reading RG7 5PR
England
+44 (0) 118 971 2121
+44 (0) 118 971 2835 fax

Germany/International:
Frauenauracher Straße 96
D 91056 Erlangen
Germany
+49 (0) 9131 909-0
+49 (0) 9131 909-205 fax

tüv
CERT
DIN EN ISO 9001:2000
Zertifikat: 01 100 5093